

1 2 3 4 5 6 7 8


Rev No.	Description	Date	Name

Focusing adjustment system  
 Locking screw

$\phi 75 \text{ h8 } -0,046$   
 Clamping diameter

$\phi 75 \text{ h8 } -0,046$   
 Clamping diameter

11,48  
 Flange distance

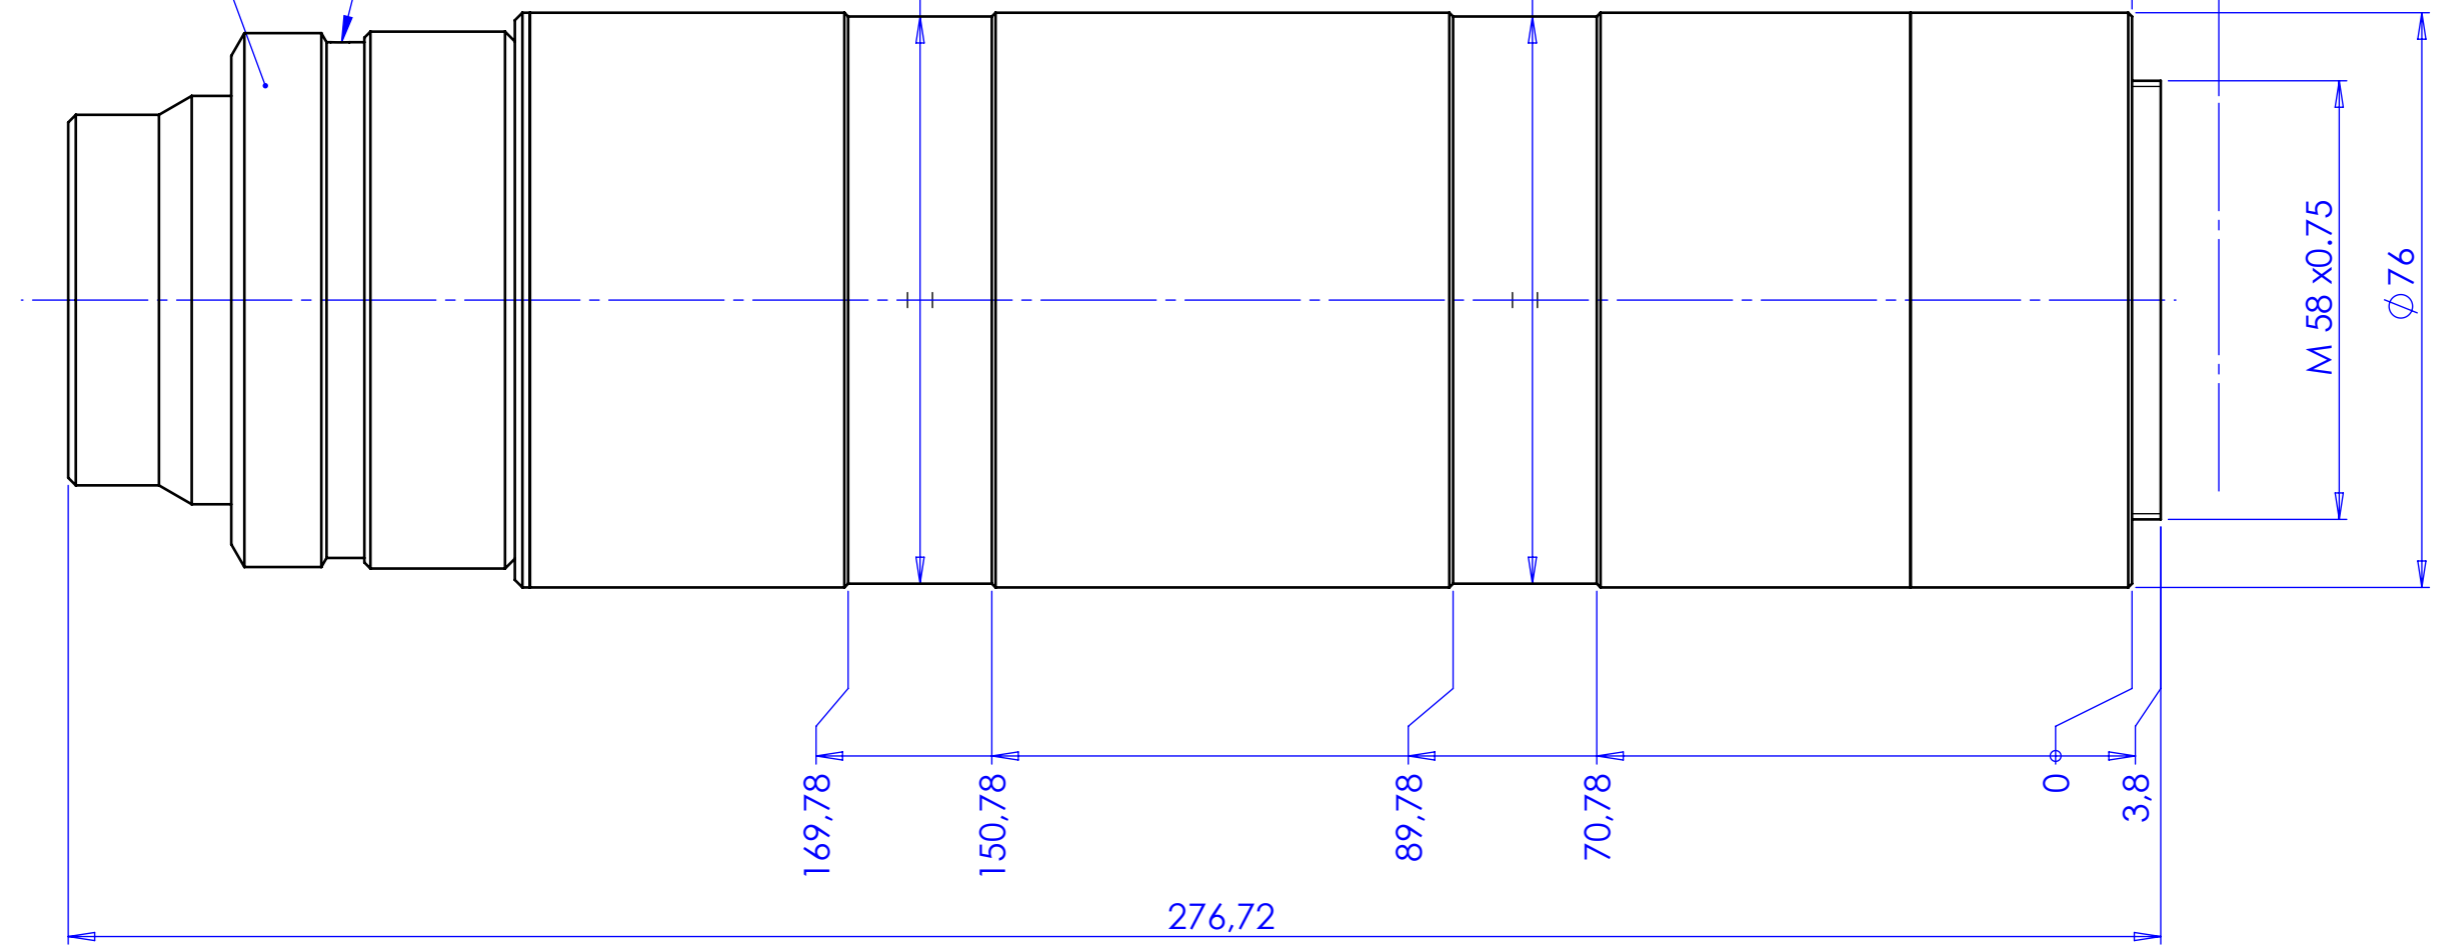

NOMINAL WORKING DISTANCE  
 94 mm  $\pm 3\%$

Material	N.A.		Mass	g	Scale	1:1		
Surface treatment	N.A.		Part No.	CO71563				
Geometrical tolerance (ISO 2768-2)			Class	K	Undimensioned bevels	0,5x45°		
Linear tolerance (ISO 2768-2)			Class	m	Undimensioned radii	R 0.5		
0.5 ±3	>3÷ 6	>6÷ 30	>30÷ 120	>120 ±400	>400÷ 1000	>1000 ±2000	>2000 ±4000	
±0.1	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2	
 <b>OPTO ENGINEERING</b> THE TELECENTRIC COMPANY			Date	Name		Drawing No.	Sheet	
			Designed	18/06/2014	Santini		DP 71563-A	1/1
			Drawn	18/06/2014	Rodella			
all dimensions are in mm <b>OPTO ENGINEERING S.r.l. - Mantova Italy - Tel. +39 0376 699111 - www.opto-engineering.com</b>			Secret and confidential - All rights reserved - No copy, dissemination or circulation is allowed unless specifically authorized in writing by OPTO ENGINEERING S.r.l. - Any violation shall be legally prosecuted.					

1 2 3 4 5 6 7 8

0 1 2 3 4 5 6 7 8 9 10